





A plastic quarter turn panel fastener W212 for perforated profiles \Box 9,5 mm, manufactured from high strength PA6 GF15 V0 material.


The panel fastener is supplied pre-assembled, making it quick and easy to connect cover panels to the enclosure by turning 90°.

The shape of the head allows for easy installation and removal of cover panels without the use of additional tools. This makes the fastener perfect for rack and data cabinets, and the option of additional seal protection, makes it even more secure.

It is also suitable for use in enclosures for the power industry or wherever a durable fastener with a high V0 fire resistance level is required.





Closed position

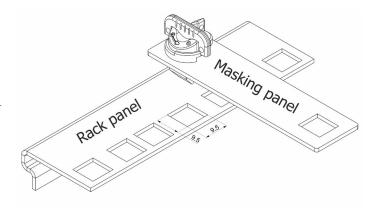

Quick Access Panel Fastener

Locking systems for industry



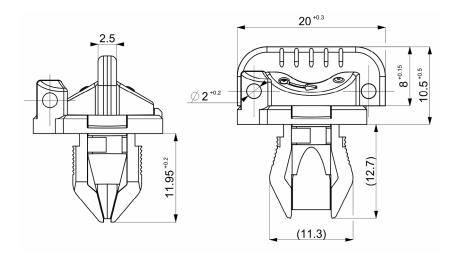

Pr	oduct Code	Total Panel Thickness	Material	Color Acc. to RAL Table
W	212	2 panels in total: 3 - 3.5 mm	PA6 GF15 V0	Standard colour: -Black RAL9005

Standard Features

- Quick fixing and removal of panels no additional tools required
- Ergonomically shaped handle cannot be over rotated
- Material: PA6GF15V0 − corrosion resistant, high strength, fire resistance level V0
- ✓ Industry standard fixing hole size: □9.5 mm
- ✓ Max panel thickness: 3-3.5 mm
- Option to add a lead seal to the fastener to protect from unauthorised access



Lowe & Fletcher Ltd (UK)

E: sales@lowe-and-fletcher.co.uk

T: +44 (0) 121 505 0400

W: www.lowe-and-fletcher.co.uk

Lowe & Fletcher Inc (USA)

E: sales@loweandfletcherinc.com

T: +1 (616) 994 0490

W: www.loweandfletcherinc.com



Euro-Locks SA NV (Belgium)

E: sales@euro-locks.be

T: +32 61 212.261

W: www.euro-locks.com

Euro-Locks SA (France)

E: euro-locks@euro-locks.fr

T: +33 (0)3.87.92.61.11

W: www.euro-locks.fr

Euro-Locks Sicherheitseinrichtungen GmbH (Germany)

E: vertrieb@euro-locks.de

T: +49 (0) 6897 9072 0

W: www.euro-locks.de

Euro-Locks Sp. z o. o. (Poland)

E: sekretariat@euro-locks.pl

T: +48 (32) 344-78-70, -82, -84

W: www.euro-locks.pl